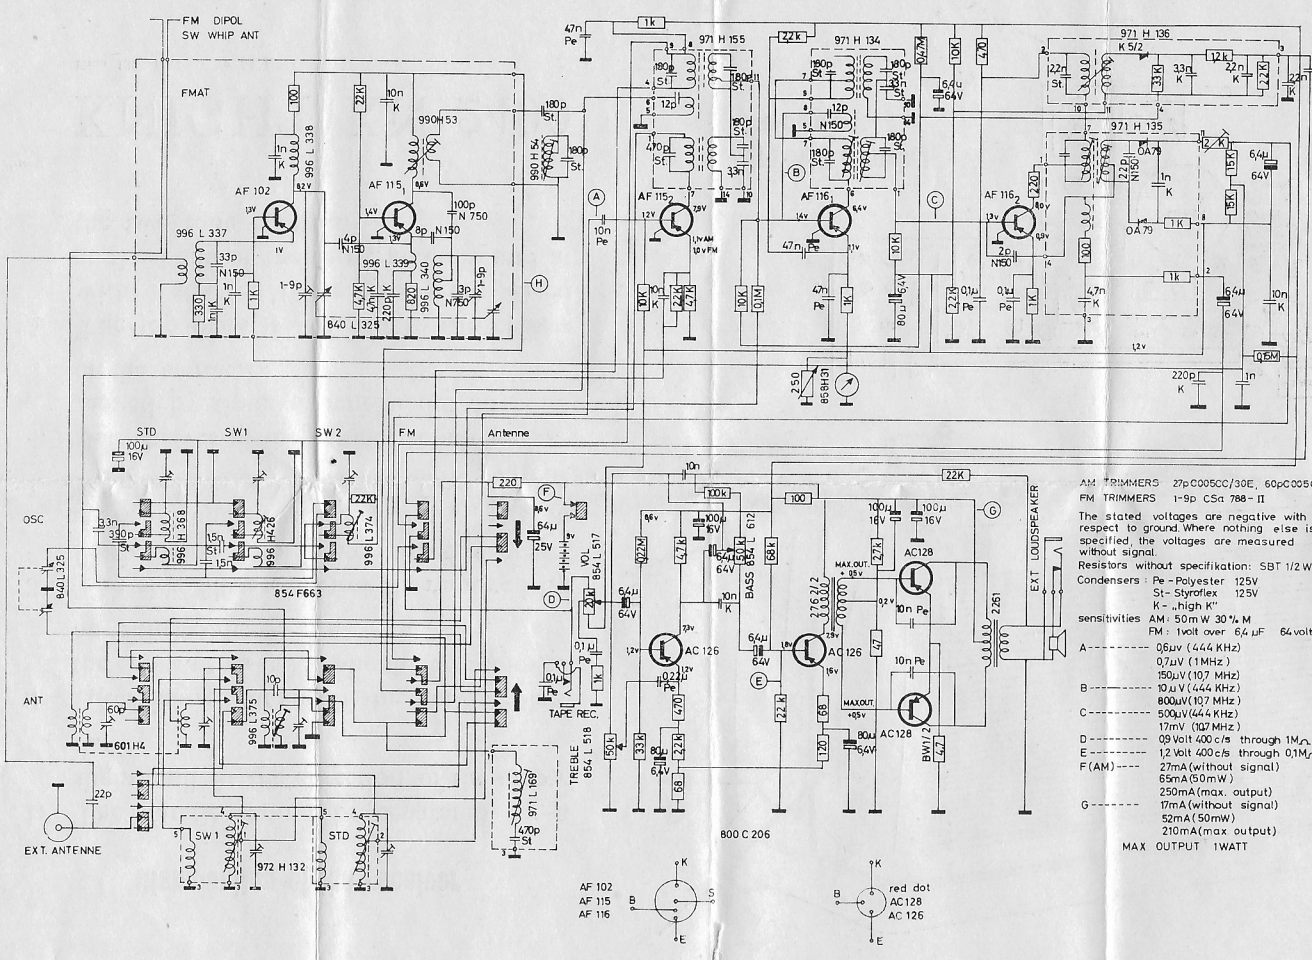

AM TRIMMERS 27pC005CC/30E, 60pC005CC/60E

FM TRIMMERS 1-9p CSa 788-II

The stated voltages are negative with respect to ground. Where nothing else is specified, the voltages are measured without signal.

Resistors without specifikation: SBT 1/2 W.

Condensers: Pe - Polyester 125V
St - Styroflex 125V
K - „high K"

sensitivities AM: 50mW 30 % M
FM: 1volt over 6,4 µF 64 volt electrolytic capacito

A ---------- 0,6µV (444 KHz)
0,7µV (1 MHz)
150µV (10,7 MHz)

B ---------- 10µV (444 KHz)
800µV (10,7 MHz)

C ---------- 500µV (444 KHz)
17mV (10,7 MHz)

D ---------- 0,9 Volt 400 c/s through 1MΩ

E ---------- 1,2 Volt 400 c/s through 0,1MΩ

F (AM) ---- 27mA (without signal)
65mA (50mW)
250mA (max. output)

G -------- 17mA (without signal)
52mA (50mW)
210mA (max. output)

MAX OUTPUT 1WATT